

## Trail Neo 1

|   |  |
|---|--|
|  <b>FRAME</b>  | Trail Neo, SmartForm C2 Alloy, Disc, Tapered Headtube  |
|  <b>FORK</b>   | RockShox Reba RL, 27,5, 120mm, Solo Air, Boost 15X110mm, tapered steerer, Maxle Lite               |
| <b>DRIVE UNIT</b>   | Shimano Steps DU-E8000, 250W   |
| <b>BATTERY</b>  | Shimano BT-E8010, 500Wh  |
| <b>DISPLAY</b>  | Shimano SC-E8000   |
| <b>CHARGER</b>  | Shimano EC-E6000-1   |
|  <b>RIMS</b>   | FREQUENCY RACE I29 27.5, tubeless ready  |
|  <b>HUBS</b>   | Formula DC-511 15x110 thru front / DHT 148x12 thru rear  |
|  <b>SPOKES</b> | Stainless 2,0  |
|  <b>TIRES</b>  | Schwalbe NOBBY NIC Evo, Pacestar, SnakeSkin, TL-Easy, Folding, 27.5x2.35" (60-584), tubeless ready |
|  <b>PEDALS</b> | N/A  |
|  <b>CRANK</b>  | Shimano FC-E8000, 170mm  |
|  <b>CHAIN</b>  | Shimano HG60, 11-speed   |

|  |   |
|--|---|
|  <b>REAR COGS</b>       | SLX M7000, 11-speed, 42-11T                       |
|  <b>REAR DERAILLEUR</b> | Shimano XT M8000 Shadow Plus 11-speed             |
|  <b>SHIFTERS</b>        | Shimano SLX M7000                                 |
|  <b>HANDLEBAR</b>       | Cannondale C3 Riser, Alloy, 15mm x 760mm width    |
|  <b>GRIPS</b>           | Cannondale Locking Grips                          |
|  <b>STEM</b>            | Cannondale C4, Alloy, 60mm (S&M)/70 mm (L&XL)     |
|  <b>HEADSET</b>         | Tange Seiki IS245, 1.5" to 1-1/8"                 |
|  <b>BRAKES</b>          | Shimano SLX M7000 hydraulic disc, 180/180mm       |
|  <b>BRAKE LEVERS</b>    | Shimano SLX M7000 hydraulic disc                  |
|  <b>SADDLE</b>          | Fabric Scoop Radius Elite                         |
|  <b>SEATPOST</b>        | Cannondale C3, 6061 alloy, 27,2X350               |
|  <b>SIZES</b>           | S, M, L, XL                                       |
|  <b>COLOR 1</b>         | Anthracite w/ Acid Red and Jet Black, Gloss - GRY |
|  <b>COLOR 2</b>         |   |
|  <b>EXTRAS</b>          |   |

SmartForm C2 Aluminum Konstruktion

Shimano Steps E8000 MTB Antrieb

SAVE Hinterbaustreben

Konisches Steuerrohr


Boost 148X12 Hinterradnaben

Schutzblech und Gepäckträger Befestigungen

Frauen spezifische Version

## GEOMETRIE

|  | XS         | S          | M          | L          | XL         |
|--|------------|------------|------------|------------|------------|
| <b>A</b> SEAT TUBE LENGTH (CM/IN)      | 36.0/14.2  | 39.0/15.4  | 43.5/17.1  | 48.5/19.1  | 53.5/21.1  |
| <b>B</b> TOP TUBE HORIZONTAL (CM/IN)   | 55.1/21.7  | 57.4/22.6  | 59.6/23.5  | 61.9/24.4  | 64.1/25.2  |
| <b>C</b> TOP TUBE ACTUAL (CM/IN)       | N/A        | ★          | ★          | ★          | ★          |
| <b>D</b> HEAD TUBE ANGLE               | 68.5°      | ★          | ★          | ★          | ★          |
| <b>E</b> SEAT TUBE ANGLE EFFECTIVE     | 73.3°      | ★          | ★          | ★          | ★          |
| <b>E'</b> SEAT TUBE ANGLE ACTUAL       | N/A        | ★          | ★          | ★          | ★          |
| <b>F</b> STANDOVER (CM/IN)             | 73.9/29.1  | 75.7/29.8  | 78.6/30.9  | 81.9/32.2  | 85.2/33.5  |
| <b>G</b> HEAD TUBE LENGTH (CM/IN)      | 10.8/4.3   | 11.3/4.4   | 12.1/4.8   | 13.0/5.1   | 13.9/5.5   |
| <b>H</b> WHEELBASE (CM/IN)             | 109.8/43.2 | 112.2/44.2 | 114.4/45.1 | 116.8/46.0 | 119.1/46.9 |
| <b>I</b> FRONT CENTER (CM/IN)          | 64.7/25.5  | 67.0/26.4  | 69.3/27.3  | 71.7/28.2  | 73.9/29.1  |
| <b>J</b> CHAIN STAY LENGTH (CM/IN)     | 45.6/18.0  | ★          | ★          | ★          | ★          |
| <b>K</b> BOTTOM BRACKET DROP (CM/IN)   | 5.0/2.0    | ★          | ★          | ★          | ★          |
| <b>L</b> BOTTOM BRACKET HEIGHT (CM/IN) | 30.7/12.1  | ★          | ★          | ★          | ★          |
| <b>M</b> FORK RAKE (CM/IN)             | 5.1/2.0    | ★          | ★          | ★          | ★          |
| <b>N</b> TRAIL (CM/IN)                 | 8.6/3.4    | ★          | ★          | ★          | ★          |
| <b>O</b> STACK (CM/IN)                 | 62.6/24.7  | 63.1/24.8  | 63.8/25.1  | 64.7/25.5  | 65.5/25.8  |
| <b>P</b> REACH (CM/IN)                 | 36.3/14.3  | 38.5/15.1  | 40.4/15.9  | 42.5/16.7  | 44.4/17.5  |

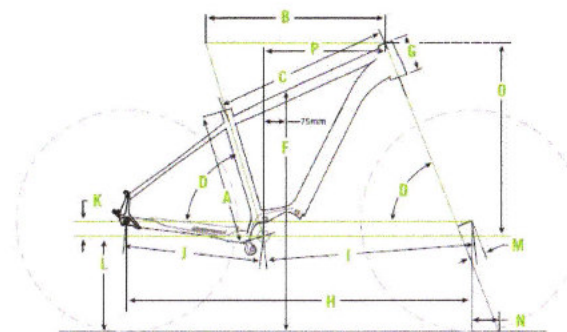

KATEGORIE

**SPORTIVE MTB**

LAUFRAD-/REIFENGRÖSSE

**27.5x2.35 / 2.25"**